




| | | | | | |
|------|--------|-------|------------------------------|-----------|--------------|
| DIST | COUNTY | ROUTE | KILOMETER POST TOTAL PROJECT | SHEET NO. | TOTAL SHEETS |
| | | | | | |

REGISTERED CIVIL ENGINEER
Tillet Satter
No. 042892
Exp. 03-31-2006
CIVIL
STATE OF CALIFORNIA


July 1, 2004
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.


To get to the Caltrans web site, go to: <http://www.dot.ca.gov>

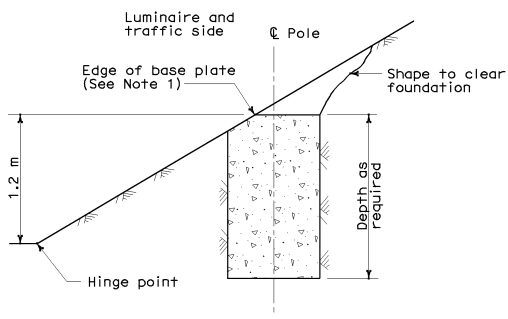

**CUT SLOPES
STEEPER THAN 1:4**
See Note 2

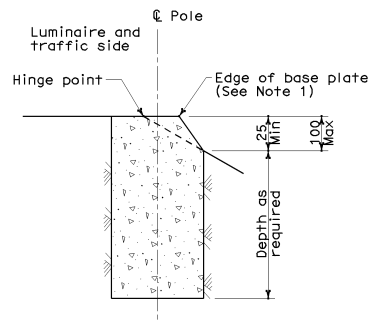


**FILL SLOPES
STEEPER THAN 1:4**
See Note 2

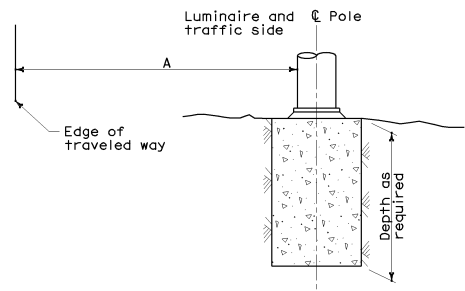


**FLAT SECTIONS, CUT OR FILL SLOPES
1:4 OR FLATTER**

| STANDARD TYPE | SETBACK (DIMENSION A) |
|--------------------|-----------------------|
| 32 | 9 m Min |
| 31, 36-20A | 6 m Min |
| 15, 15D, 15-SB, 30 | Mast Arm Length (Min) |

**FOUNDATIONS ADJACENT TO ALL ROADWAYS EXCEPT
IN SIDEWALK, MEDIAN AND ISLAND AREAS**

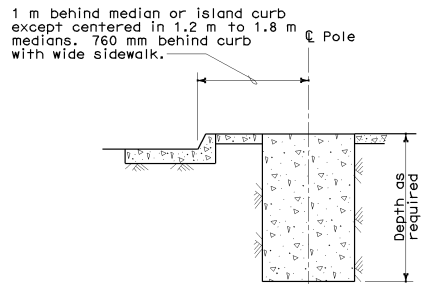

**MEDIAN, ISLAND
OR WIDE SIDEWALK
(2 m wide and wider)**

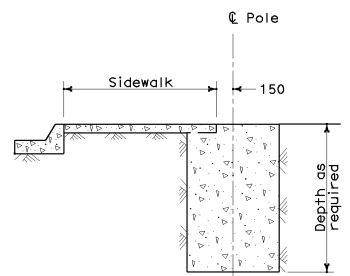

**NARROW SIDEWALK
(Less than 2 m wide)**

FOUNDATIONS IN SIDEWALK, MEDIAN AND ISLAND AREAS

NOTES

- Where a portion of the foundation is above grade, the top edges shall have a 25 mm chamfer.
- Horizontal setbacks on cut and fill slopes steeper than 1:4 shall not exceed the distance shown for flat sections.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS
(FOUNDATION INSTALLATIONS)**

NO SCALE
ALL DIMENSIONS ARE IN
MILLIMETERS UNLESS OTHERWISE SHOWN

ES-11